


realstone **SYSTEMS**
Rejoicing. Timeless. Enduring.

tempered

COLLECTION

GLAZED TILE

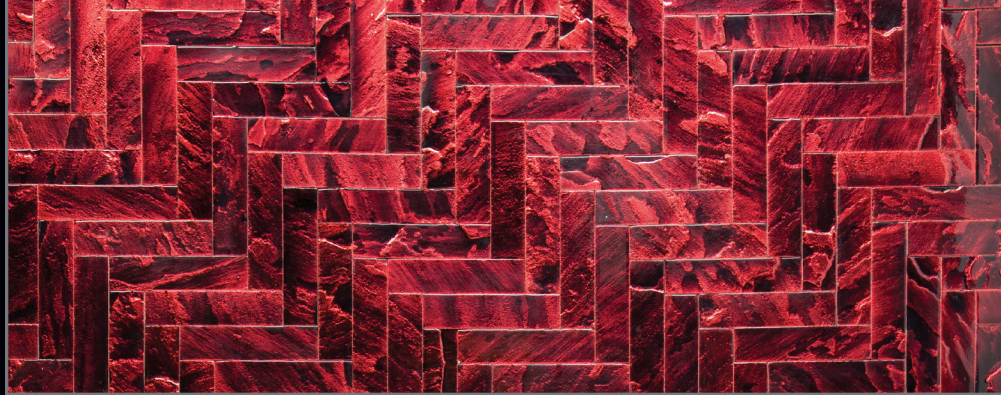

INSTALLATION TIPS

During installation, handle tile with care to prevent marring the surface.

Tempered Glazed tile is heat sensitive and not appropriate in areas where its surface will exceed the ambient room temperature.

Standard tile installation is recommended. For best results, use white mortar with full coverage.

Cutting: non-toothed, diamond blade saw.

INSTALLATION PRODUCTS

Use polymer modified mortar. We recommend the products below or equal.

Tested installation products

- Bostik Reflex Ultra-Premium Polymer-Modified Thin Set Mortar
- Bostik Big Tile & Stone Polymer-Modified Large & Heavy Tile Mortar
- Bosti-Set Thin Porcelain Tile Panel Adhesive & Sound Reduction Membrane
- Bostik Dimensions Glass filled, pre-mixed, urethane grout

HOW TO FINISH AN EDGE

Installations can be finished off with matching pencil trim, metal tile edge, wood or other framing.

CLEAN UP

1. When removed, the thin protective film on the Tempered tiles can leave a small amount of residue on the surface. We recommend the use of PROSOCO's Cleaner/Degreaser, diluted with four parts water.
2. For post-installation cleaning (if needed for grout stains), PROSOCO's SafEtch, diluted with two parts water is recommended.
3. For daily maintenance and clean up use PROSOCO's 2010 All Surface Cleaner.

For additional information and project photos visit www.realstone.com

For installation instructions always refer to local building codes and consult your trained installation professional.

REALSTONE DISCLAIMS ALL LIABILITY FOR THE INSTALLATION OF THE PRODUCTS PURCHASED, AND LEAVES UP TO THE CUSTOMER AND CUSTOMER'S TRAINED INSTALLATION PROFESSIONAL THE SELECTION OF THE MATERIALS AND METHODS APPROPRIATE FOR THE USE AND INSTALLATION OF THE PRODUCT IN THE CUSTOMER'S SPECIFIC LOCATION AND CIRCUMSTANCES.