












The desire to combine and fashion a contemporary, yet classic stone-look tile propelled us forth in creating Rustic Stone. Aesthetically we aimed to pay reverence toward the striking and present neo-industrial cement-look, combined with a rural natural stone expression. Simply, we've designed a modern reinterpretation of a rustic stone floor – with a twist.

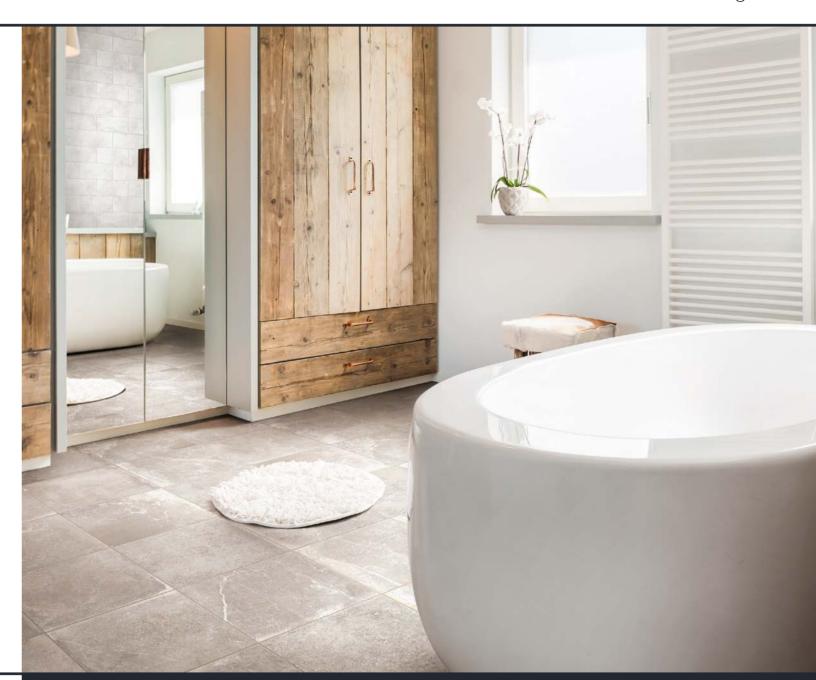

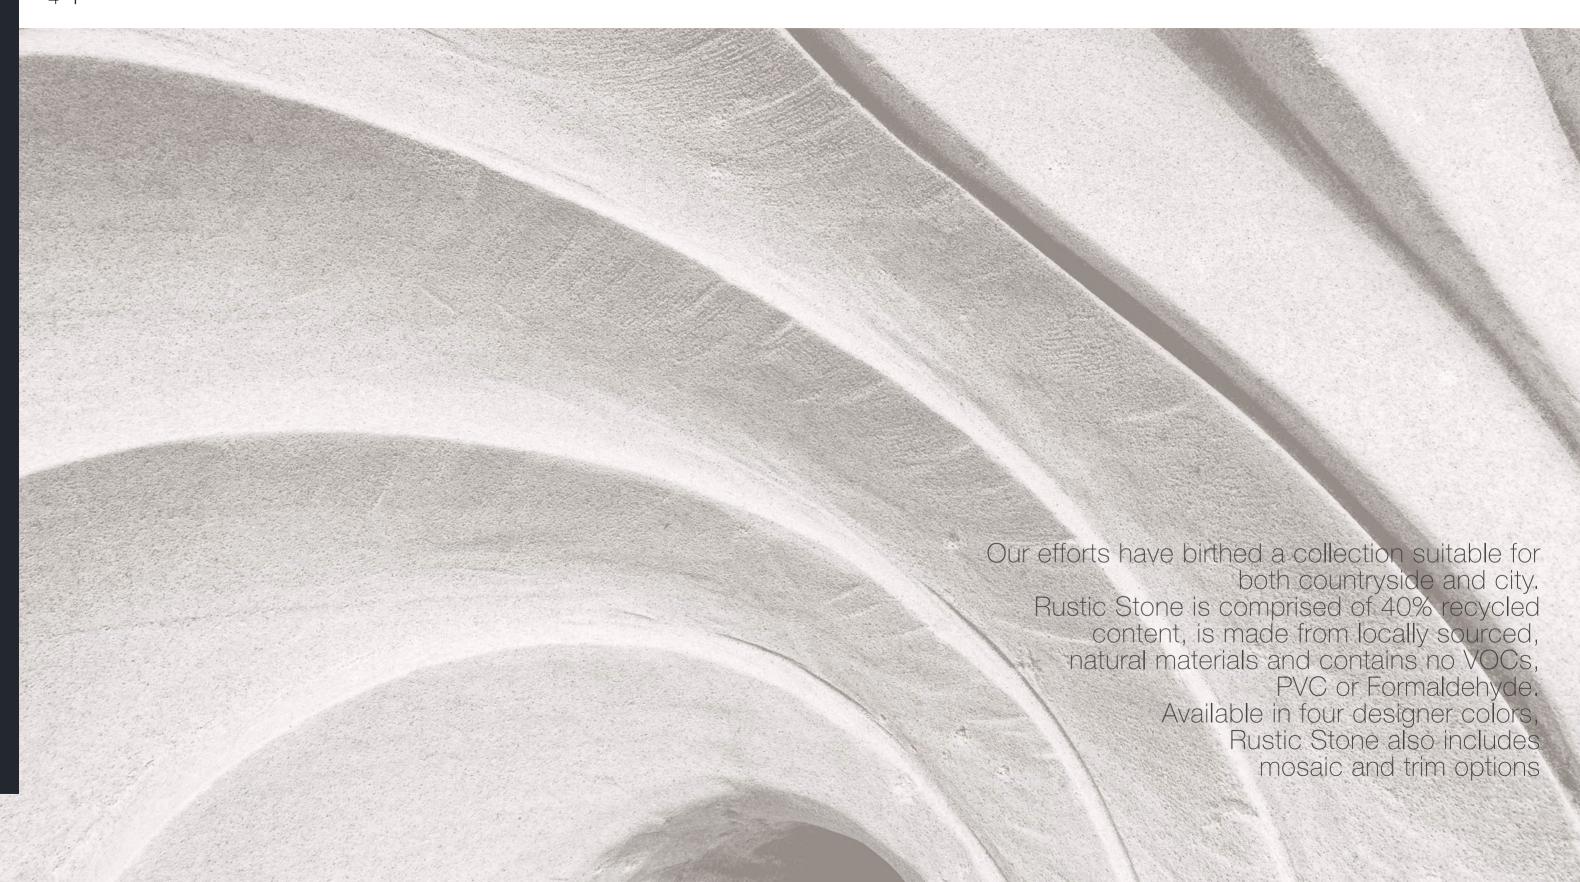


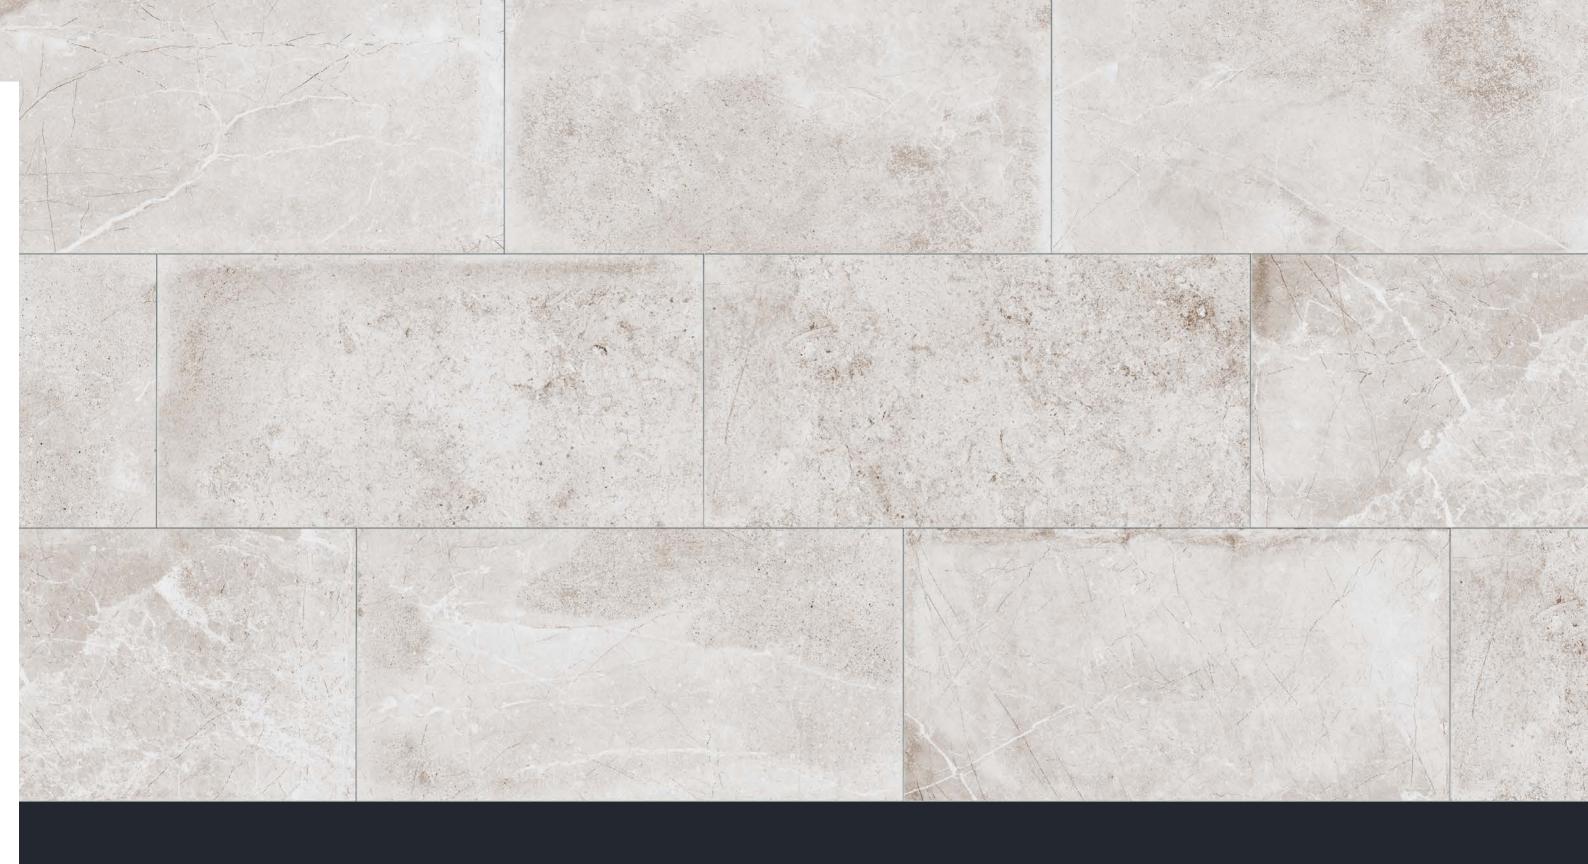








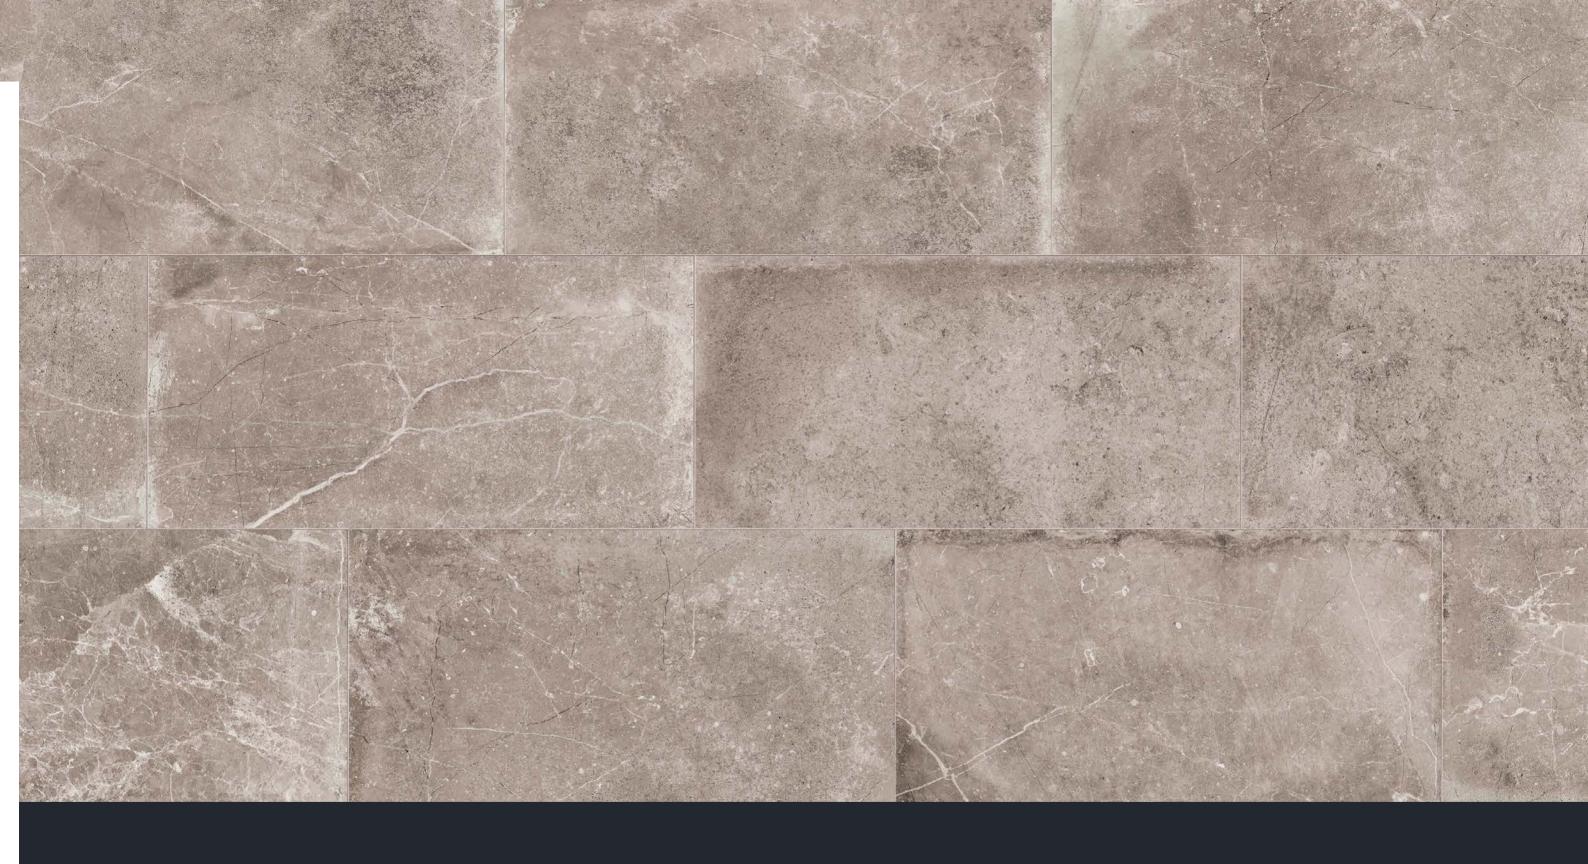






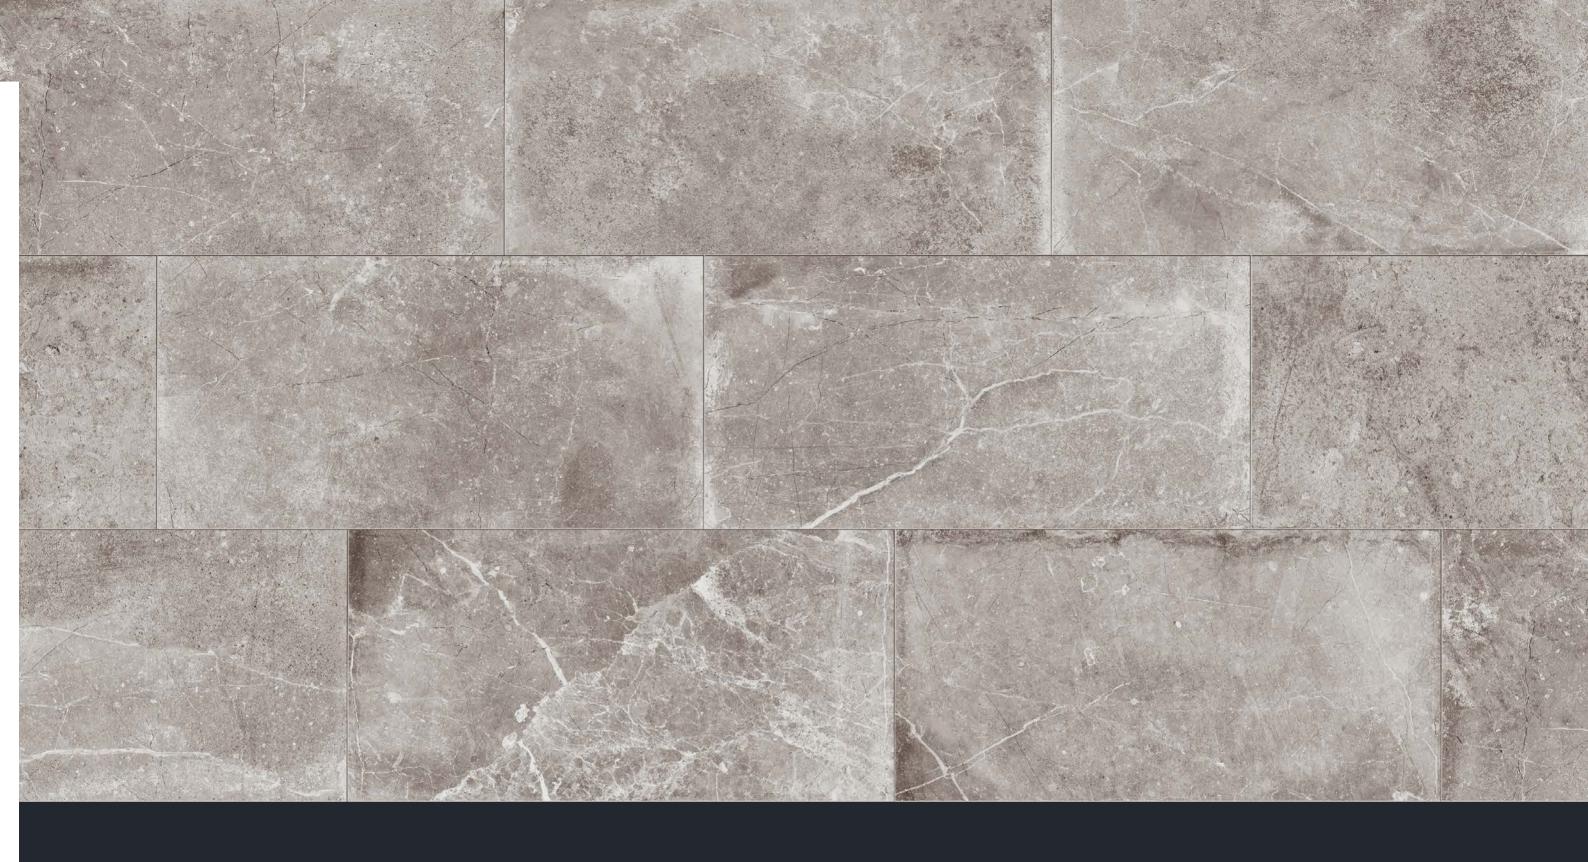









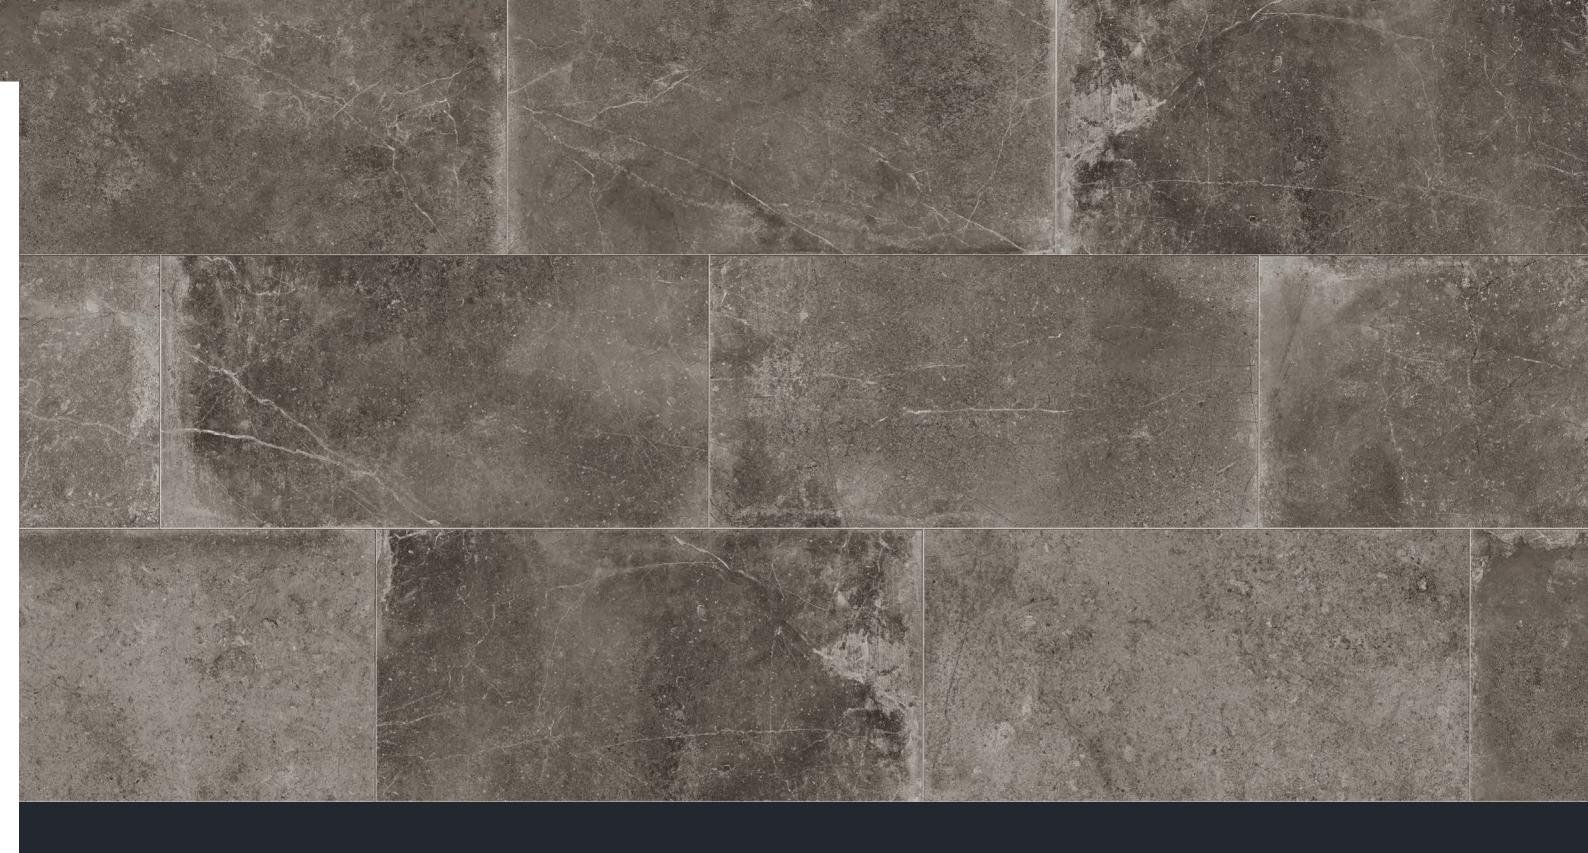

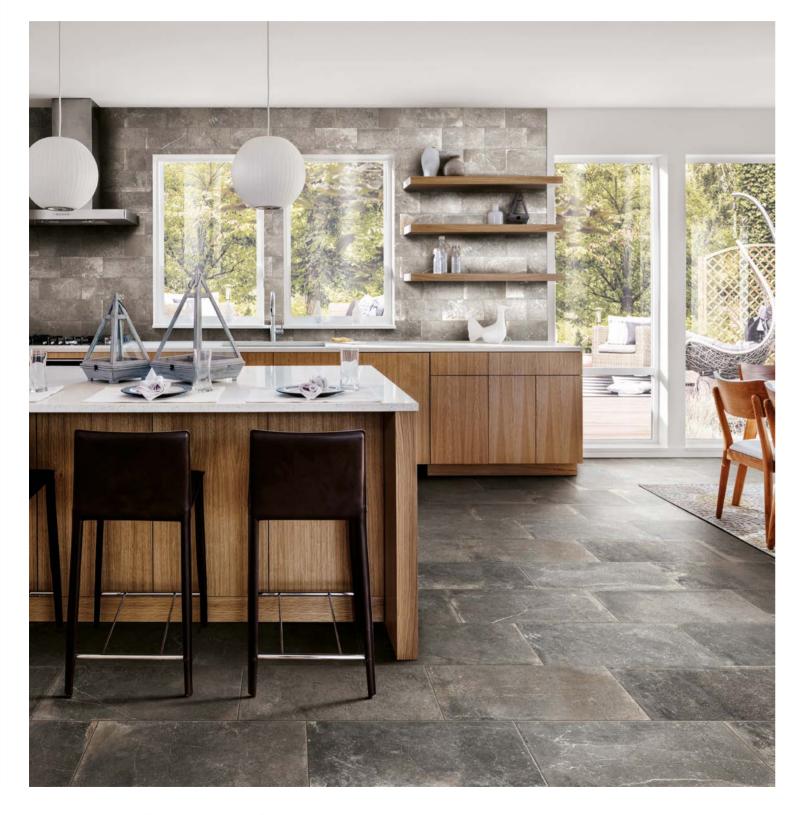

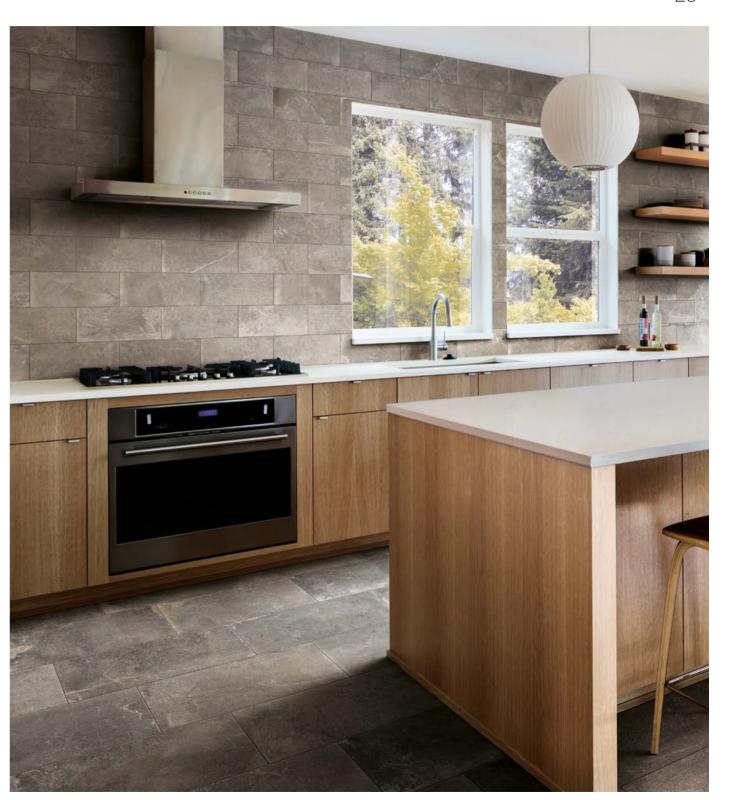





#### sizes:

12"x24" pressed

1102131 White 1102132 Taupe 1102133 Grey 1102134 Charcoal

12"x12" pressed

1102157 White 1102158 Taupe 1102159 Grey 1102160 Charcoal

6"x12" pressed

1102139 White 1102140 Taupe

1102141 Grey 1102142 Charcoal

Colors shown may vary from actual product.
Final selection should be made from actual product samples.

### mosaics & trim pieces:

## 12"x12" **Mosaic**


(36 dot) 2"x2"



1102147 White 1102147 White 1102148 Taupe 1102149 Grey 1102150 Charcoal

#### 3"x12" Bullnose

1102143 White 1102144 Taupe 1102145 Grey 1102146 Charcoal



UNIFORM APPEARANCE

Differences among pieces from the same production

SLIGHT VARIATION

Clearly distinguishable differences in texture and/ or pattern with similar colors.



VARIATION

While the colors present on a single piece of tile will be indicative of the colors to be expected on the other tiles, the amount of colors on each piece will vary significantly.



SUBSTANTIAL VARIATION

Random color differences from tile to tile, so that one tile may have totally different colors from that on other tiles. Thus, the final installation will be unique.



## technical specifications

	_	REFERENCE VALUE	DECLARED VALUE	TEST METHOD
	SURFACE ABRASION		IV	ASTM C1027
	WATER ABSORPTION	≤0.5%	MEETS REQUIREMENT	ASTM C373
	CHEMICAL RESISTANCE	AS REPORTED	NOT AFFECTED	ASTM 650
*	DYNAMIC COEFFICIENT OF FRICTION	≥0.42 WET	MEETS REQUIREMENT	ANSI A137.1
黨	STAIN RESISTANCE	AS REPORTED	NOT AFFECTED	ASTM C1378
۵	BREAKING STRENGTH	AS REPORTED	≥400	ASTM C648
*	RESISTANCE TO FREEZE	AS REPORTED	RESISTANT	ASTM C1026



RESISTANT FOR THE HOUSE The product is water-resistant: it stops liquids, body oils, acidic and staining substances from penetrating the tiles. It resists scratches, scuffs and gauges better than any other floor covering. It does not absorb fumes, odors or smoke. It doesn't discolor or fade when exposed to sunlight, or other natural elements. It is completely fire proof. It resists burns and doesn's feed a fire. Its high resistance to abrasive dirt and grime makes it suitable even for heavy-traffic areas of the house such as hallways, entrances, foyers and walkways.

FROST RESISTANT Exceeding the ADA standard requirements, the Milestone product can also be used for outside applications. It stands up to abrupt temperature changes and freezing-thaw cycles. When properly installed according to ANSI A137.1. It's strong enough to be used in exterior applications even in frigid climates. Proper consideration must be given to the anti-slip requirements of the area to be tiled.

ANTI-SLIP The testing conducted on our finished product will guarantee that all of our

ANTI-SLIP The testing conducted on our finished product will guarantee that all of our tiles will have an anti-slip surface so they may be used with total confidence in kitchen and bath applications. The Milestone product is perfect for both home and commercial interiors, such as restaurants, offices, retail stores, etc. Its anti-slip properties provide a safe walkking surface in both wet and dry conditions, according to the Americans with Dispublition Act.

HYGIENE/SANATATION & EASY CLEANING The Milestone product doesn't absorb odors or bacteria of any kind. It's easy to clean with a dampsponge, mop, or cloth. For a more intense cleaning, simply use a mild solution of water and a common household detergent. Regular cleaning will stop the growth of germs and bacteria in damp areas such as the hathroom

• DUE TO THE INHERENT NATURE OF FIRED PORCELAIN TILE, IT IS IMPORTANT TO NOTE THAT THE COEFFICENT OF FRICTION MAY VARY WITHIN AND BETWEEN PRODUCT RUNS.

## packaging

SIZES		THICKNESS (MM)	PIECES PER BOX	UOM PER BOX	WEIGHT PER BOX	BOXES PER PALLET	UOM PER PALLET	WEIGHT PER PALLET*
FIELD TILES								
12"x24" PRESSED	NOMINAL	8 mm	8	16 SF	54.4	48	768 SF	2,611
12"x12" PRESSED	NOMINAL	8 mm	16	16 SF	54.4	48	768 SF	2,611
6"x12" PRESSED	NOMINAL	8 mm	25	12.5 SF	42.5	64	800 SF	2,720
MOSAICS AND COORDINATING TRIMS								
3"x12" BULLNOSE	NOMINAL	8 mm	15	15 PCS	14.55	168	2,520 PCS	2,444
12"x12" MOSAIC (2"x2" . 36 DOT)	NOMINAL	8 mm	10	10 PCS	33	45	450 PCS	1,485

MINIMUM GROUT SIZE RECOMMENDED = 5 MM (OR APPROX. 3/16") IF STAGGERED TILE PLACEMENT, WE RECOMMEND USING A 30% OFFSET. IF SPECIFIED BRICK PATTERN WITH 1/2 PATTERN MANDATORY, A BIGGER GROUT IS RECOMMENDED TO HIDE IMPERFECTIONS OF INSTALLATION (MINIMUM 1/4").

<sup>\*</sup> WEIGHT PER PALLET DOES NOT INCLUDE PALLET WEIGHT ITSELF.
ALL OTHER SIZES WILL BE PACKAGED AS ORDERED.
PLEASE CONTACT MILESTONE CUSTOMER SERVICE AT 1-877-356-7461 FOR PACKAGING INFORMATION.

# CLEANING & MAINTENANCE

#### Routine care instructions:

Wash with water to remove superficial dirt.
 Application of Fila Cleaner® Fila (commercial product) diluted to an average of 1:200 to the surface.
 Let the solution sit 5-7 minutes.

**4.** Remove the cleaner with a vigorous mechanical cleaning action using common hand cleaning equipment, or a suitable floor-cleaning appliance.

**5.** Dry the floor completely.

Note: For desired results, it is particularly important to combine the effect of the detergent with a vigorous mechanical cleaning action.

The products mentioned in these instructions do not officiate any official agreements with any floor cleaning product producers.

# CONTIDUES TO LEED Credits CONTIDUES TO LEED CRE

## PROGRESS THAT TOUCHES AND INVESTS IN THE ENTIRE SOCIETY

As a active member of the U.S Green Building Council, Milestone spreads awareness to the entire American communities and encourages towards the use of building solutions inspired by environmentally friendly practices. Using Milestone products for project implementation, will positively contribute in obtaining scores and points required for earning the LEED certification

(Leadership in Energy and Environmental Design).

## A COMMITMENT TO THE DEVELOPMENT OF PRODUCTS FOR A CONSCIOUS BUILDING TRADE

Milestone offers products containing recycled material. The adoption of eco-compatible production systems is merit of Italian designs produced in the U.S.

## TECHNICAL DEVELOPMENT THAT CONSIDERS THE NATURAL ENVIRONMENT

Milestone commits to the eco-compatible project and translates the same into an avant-guard production process, minimizing the negative impact on the environment.

#### WHY PORCELAIN?

There are many reasons to choose impervious porcelain tile over other floor coverings. It offers the largest array of design options and holds its value the longest. In a comparison between the many different flooring options, porcelain tile offers one of the most durable and least expensive options over the lifespan of the building.

#### Benefits of Porcelain Tile

- Impervious to water
- Easy to maintain
- Variety of design options
- Environmentally friendly
- · Resistant to germs and bacteria
- Fade resistant
- Fire resistant
- Durable best long-term value vs. other floor coverings

#### **SUGGESTED INSTALLATIONS**

PEI Class

### Moderate to heavy foot traffic

ecommended for all ssidential applications as ell as medium commercial nd light institutional pplications.





