









Moved by the beauty of natural stone and built upon the stratum of ancient foundations, we present Verve.

Rich details, impeccable design and craftmanship come together to create a standard of excellence unparalleled.

Warm up modern spaces, enhance traditional décor,


Verve is both modern and classic in its simplistic, yet eye-catching design.

Available in four designer colors including White,

Sand, Earth and Multicolor,

Verve embodies strength and elegance.

Round out the entire design with multiple size and trim options to create a seamless look from floor to wall.

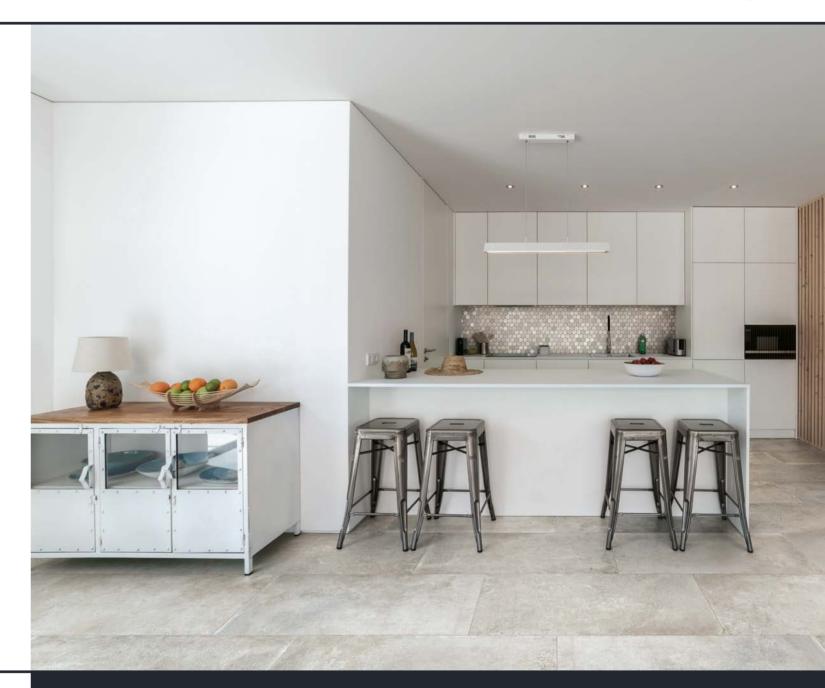




7







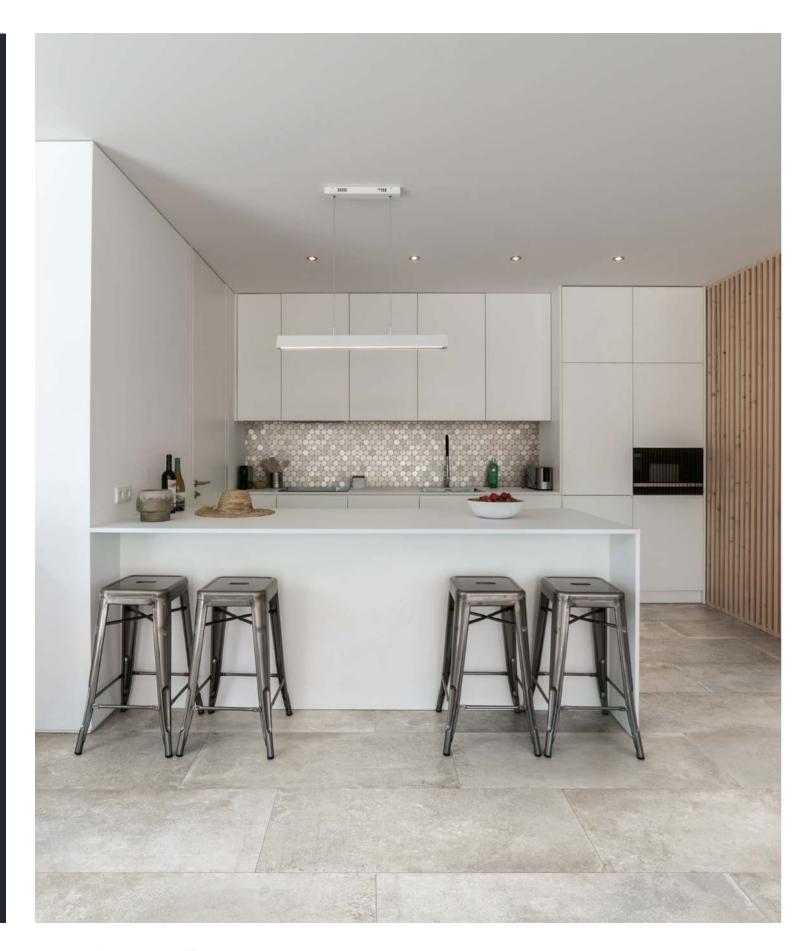




24"x48" / **WHITE** . 13^{3/4}"x14" / **WHITE** Circles Mosaic







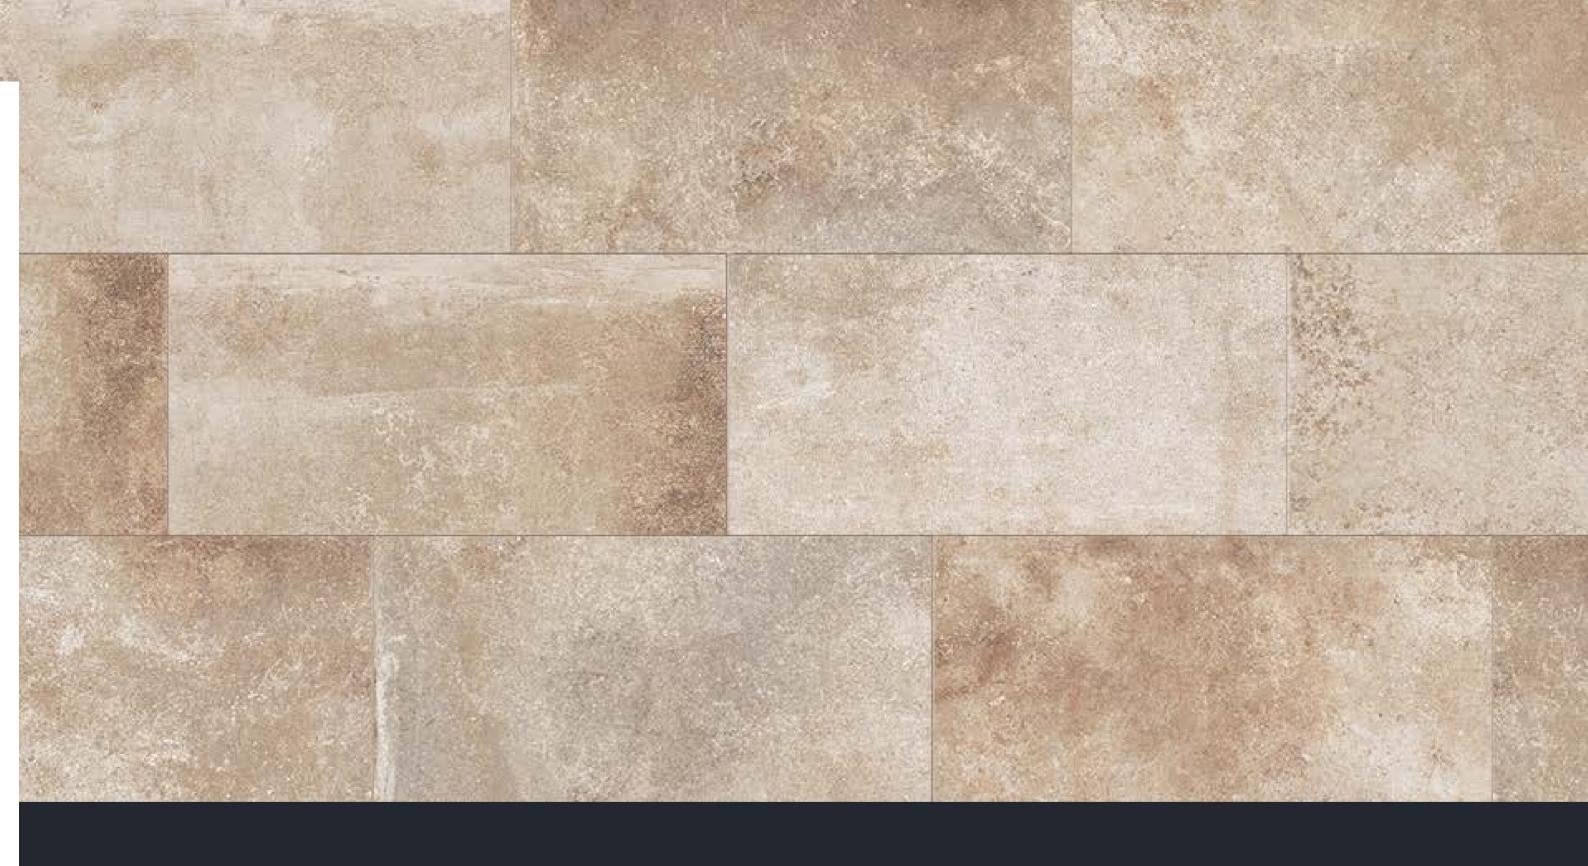














12"x24" / **SAND** . 12"x12" / **SAND** . 9"x11" / **SAND** Hexagon Mosaic

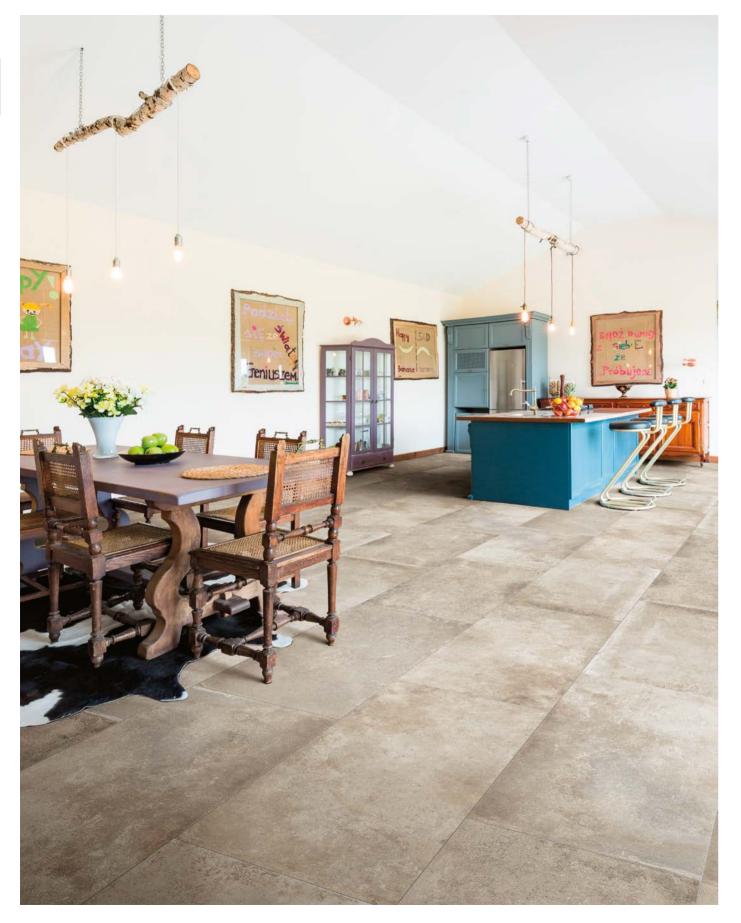

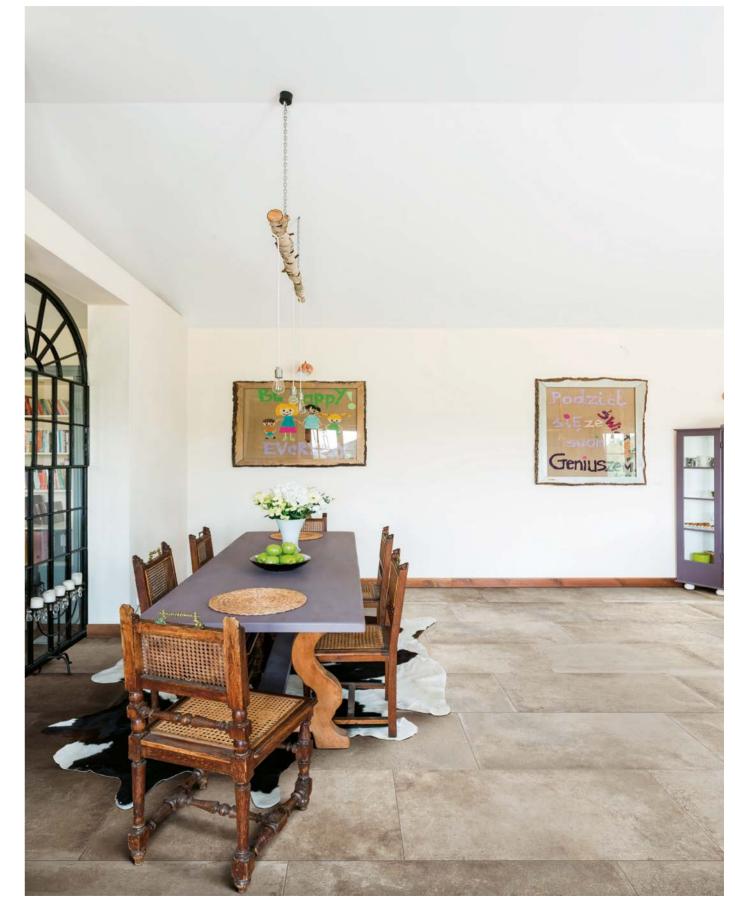

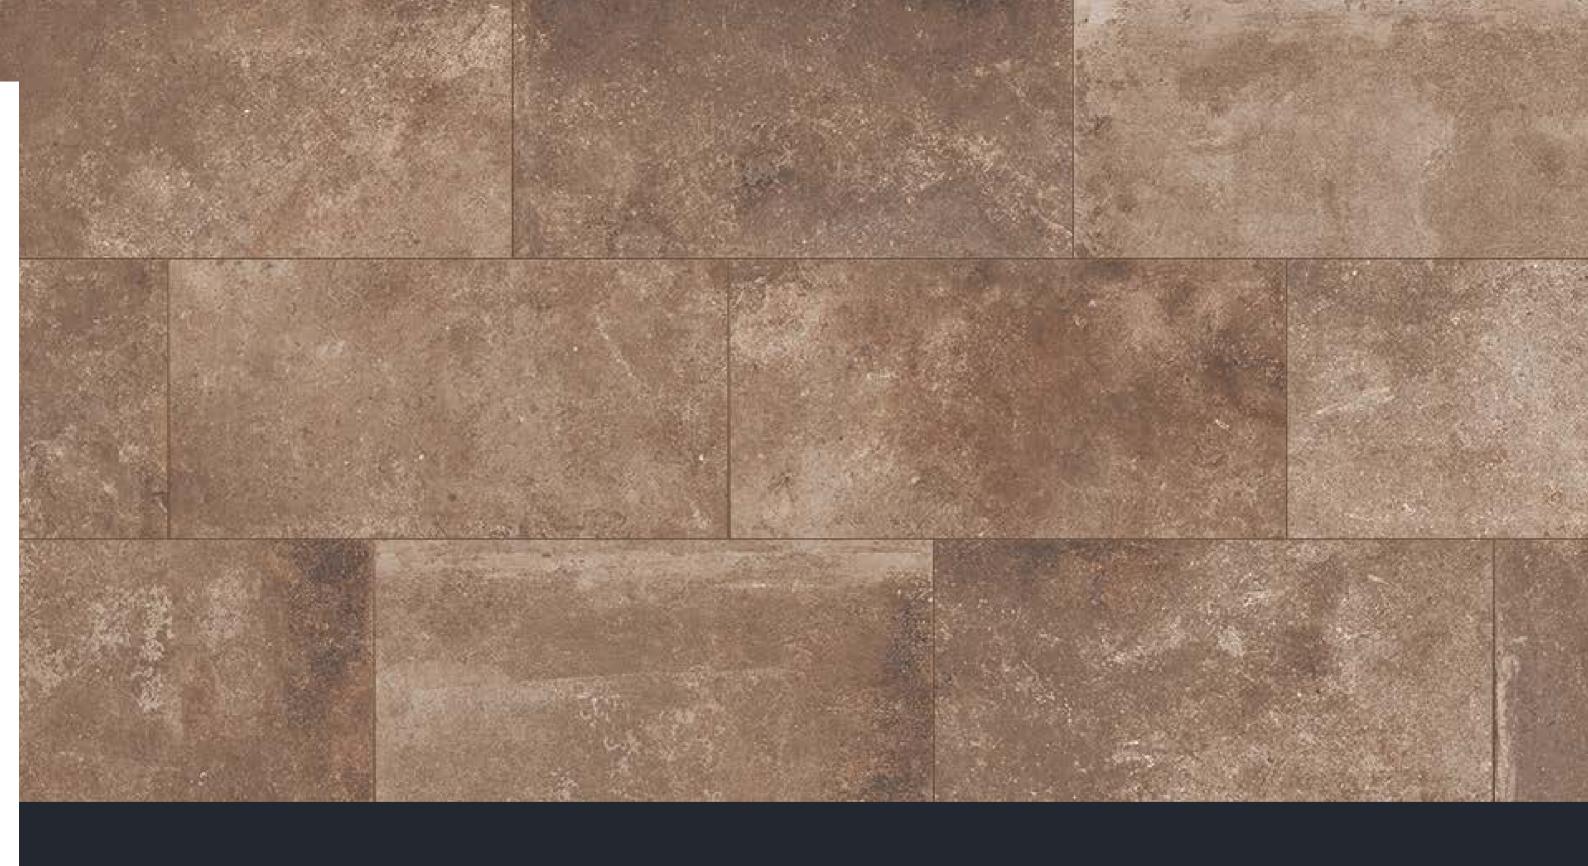












24"x48" / EARTH . 24"x24" / EARTH OUTDOOR #2

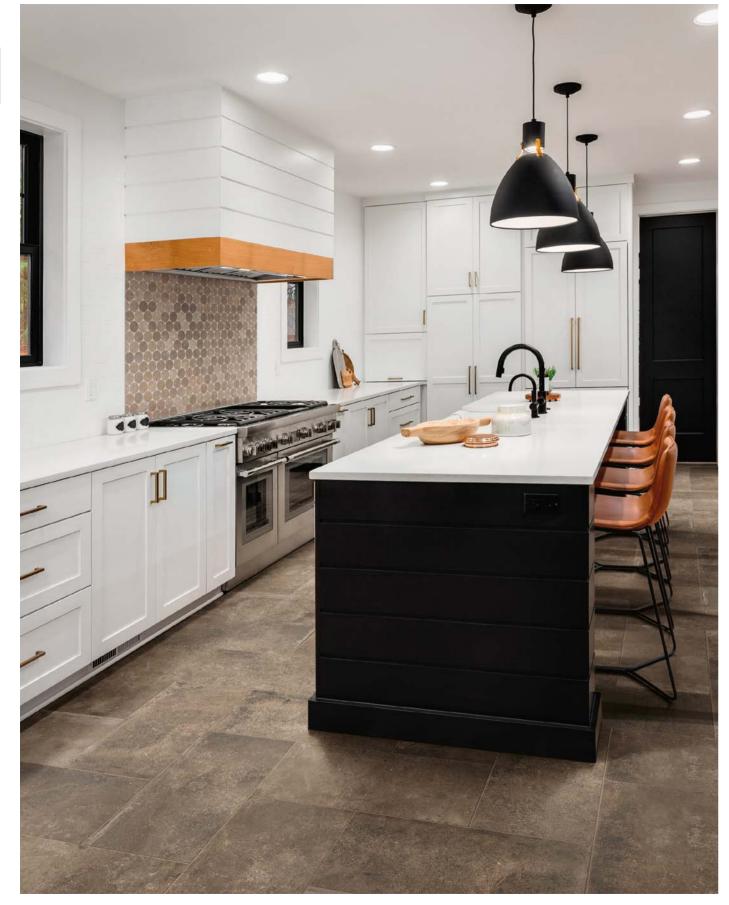

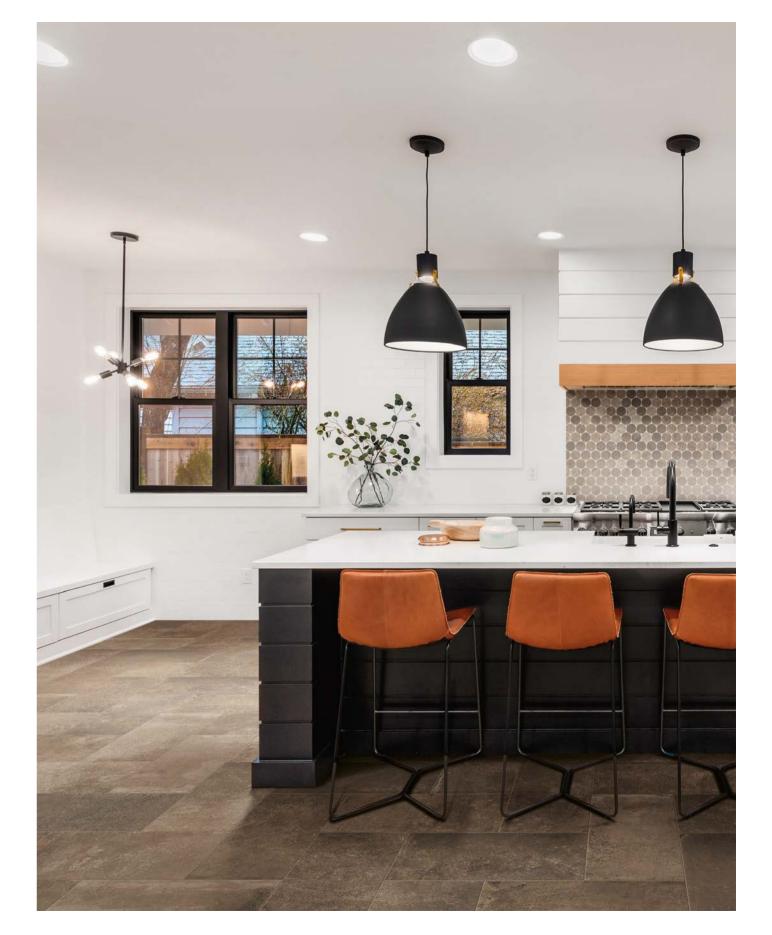

12"x24" / EARTH . 133/4"x14" / EARTH Circles Mosaic



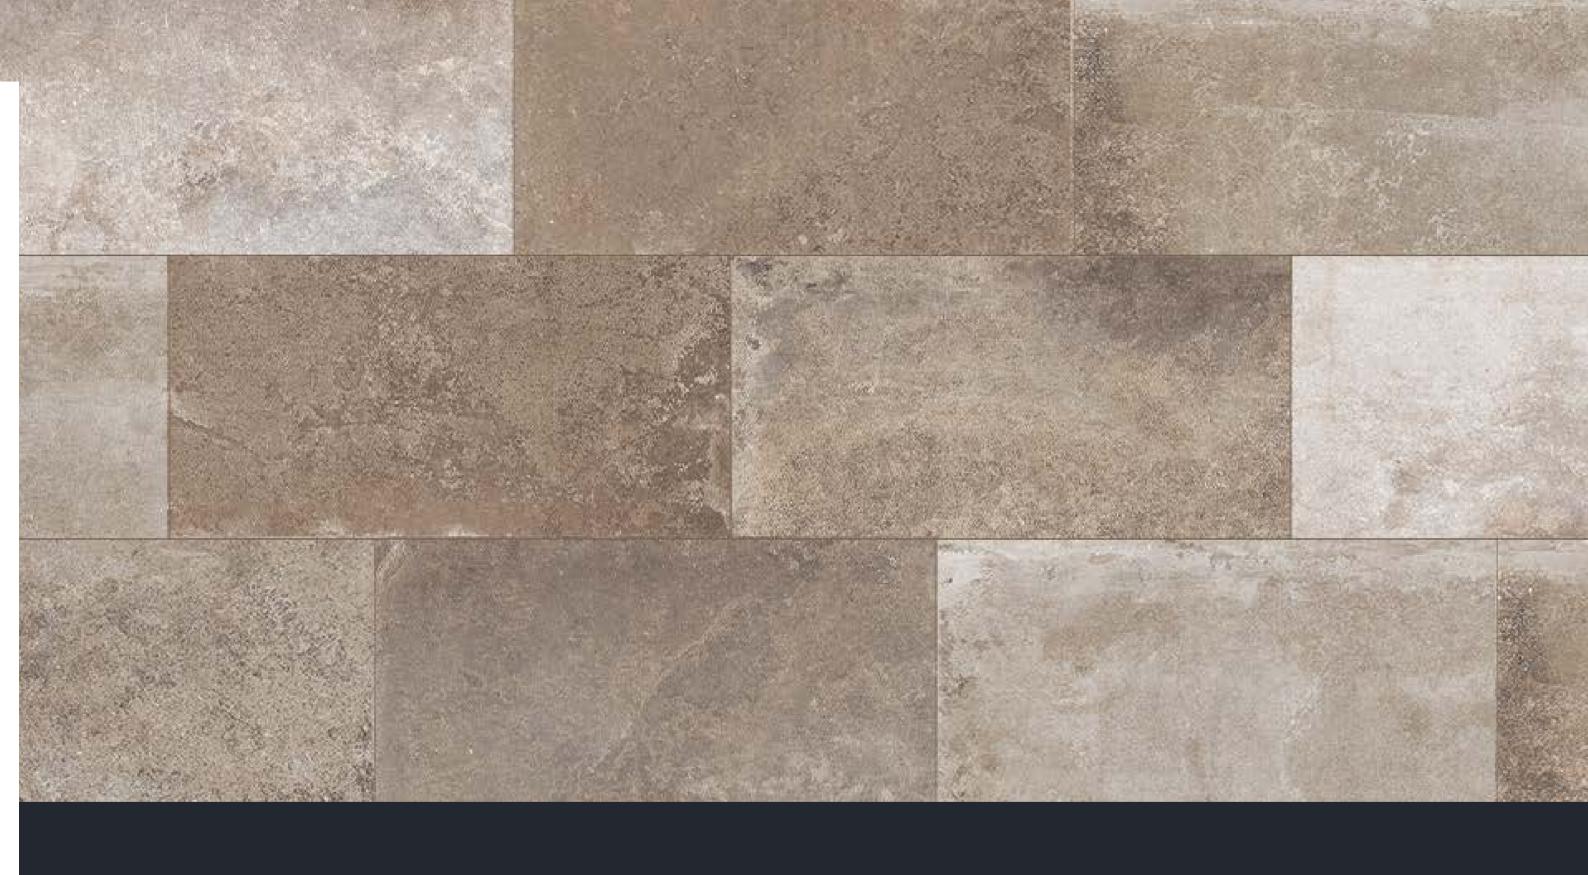















SIZES & SHADE VARIATION

OUTDOOR (20M13/4IN) sizes: 24"x24" Rectified 20 mm 24"x48" Rectified 10 mm 1102232 White 1102233 Sand 1102234 Earth 1102235 Multicolor 1102192 White 1102193 Sand

12"x12" 12"x24" Pressed 8 mm Pressed 8 mm 1102200 White 1102208 White 1102201 Sand 1102209 Sand 1102210 Earth 1102202 Earth 1102203 Multicolor 1102211 Multicolor

Due to the high shade variation of this product, it is required that you open at least four (4) boxes of MULTICOLOR at the same time and lay out/determine the desired pattern prior to installation. Claims will not be accepted after tiles have been set. Select tile from the same job, size, and shade numbers. Visually inspect the tile prior to instillation. Rotate tiles to ensure a non-repeat look.

Colors shown may vary from actual product.
Final selection should be made from actual product samples.

1102194 Earth

1102195 Multicolor

mosaics & trim pieces:

12"x12" Mosaic (36 dot) 2"x2"



1102212 White 1102213 Sand 1102214 Earth 1102215 Multicolor

9"x11" Hexagon Mosaic (12 dot)



1102250 White 1102251 Sand 1102252 Earth 1102253 Multicolor

13 ^{3/4}"x14" Circles Mosaic (30 dot)



1102216 White 1102217 Sand 1102218 Earth 1102219 Multicolor

3"x12" Bullnose

1102220 White 1102221 Sand 1102222 Earth 1102223 Multicolor




UNIFORM APPEARANCE Differences among pieces

from the same production run are minimal.



SLIGHT VARIATION

Clearly distinguishable differences in texture and/ or pattern with similar colors.



VARIATION

While the colors present on a single piece of tile will be indicative of the colors to be expected on the other tiles, the amount of colors on each piece will vary significantly.



VARIATION

Random color differences from tile to tile, so that one tile may have totally different colors from that on other tiles. Thus, the final installation will be unique.



technical specifications

	_	REFERENCE VALUE	DECLARED VALUE	TEST METHOD	
	SURFACE ABRASION		IV	ASTM C1027	
	WATER ABSORPTION	≤0.5%	MEETS REQUIREMENT	ASTM C373	
	CHEMICAL RESISTANCE	AS REPORTED	NOT AFFECTED	ASTM 650	
*	DYNAMIC COEFFICIENT OF FRICTION	≥0.42 WET	MEETS REQUIREMENT	ANSI A137.1	
*	STAIN RESISTANCE	AS REPORTED	NOT AFFECTED	ASTM C1378	
۵	BREAKING STRENGTH	AS REPORTED	≥400	ASTM C648	
*	RESISTANCE TO FREEZE	AS REPORTED	RESISTANT	ASTM C1026	



RESISTANT FOR THE HOUSE The product is water-resistant: it stops liquids, body oils, acidic and staining substances from penetrating the tiles. It resists scratches, scuffs and gauges better than any other floor covering. It does not absorb fumes, odors or smoke. It doesnt discolor or fade when exposed to sunlight, or other natural elements. It is completely fire proof. It resists burns and doesn's feed a fire. Its high resistance to abrasive dirt and grime makes it suitable even for heavy-traffic areas of the house such as hallways, entrances, foyers and walkways.

FROST RESISTANT Exceeding the ADA standard requirements, the Milestone

FROST RESISTANT Exceeding the ADA standard requirements, the Milestone product can also be used for outside applications. It stands up to abrupt temperature changes and freezing-thaw cycles. When properly installed according to ANSI A137.1 It's strong enough to be used in exterior applications even in frigid climates. Proper consideration must be given to the anti-slip requirements of the area to be tiled.

ANTI-SLIP The testing conducted on our finished product will guarantee that all of our tiles will have an anti-slip surface so they may be used with total confidence in kitchen and bath applications. The Milestone product is perfect for both home and commercial interiors, such as restaurants, offices, retail stores, etc. Its anti-slip properties provide a safe walkking surface in both wet and dry conditions, according to the Americans with

HYGIENE/SANATATION & EASY CLEANING The Milestone product doesn't absorb odors or bacteria of any kind. It's easy to clean with a dampsponge, mop, or cloth. For a more intense cleaning, simply use a mild solution of water and a common household detergent. Regular cleaning will stop the growth of germs and bacteria in damp areas such as the bathroom.

[•] DUE TO THE INHERENT NATURE OF FIRED PORCELAIN TILE, IT IS IMPORTANT TO NOTE THAT THE COEFFICENT OF FRICTION MAY VARY WITHIN AND BETWEEN PRODUCT RUNS.

packaging

SIZES		THICKNESS (MM)	PIECES PER BOX	UOM PER BOX	WEIGHT PER BOX	BOXES PER PALLET	UOM PER PALLET	WEIGHT PER PALLET*
FIELD TILES								
24"x48" RECTIFIED	NOMINAL	10	2	16 SF	72.8	32	512 SF	2,457.6
12"x24" PRESSED	NOMINAL	8	8	16 SF	54.4	48	768 SF	2,611.2
12"x12" PRESSED	NOMINAL	8	17	17 SF	57.8	48	816 SF	2,774.4
24"x24" RECTIFIED	NOMINAL	20	2	8 SF	72	36	288 SF	2,592
MOSAICS AND COORDINATING TRIMS								
12"x12" MOSAIC (36 DOT)	NOMINAL	8	10	10 PCS	33	45	450 PCS	1,485
9"x11" HEXAGON MOSAIC	NOMINAL	8	10	10 PCS	33	45	450 PCS	1,485
133/4"x14" CIRCLES MOSAIC (30 DOT)	NOMINAL	8	10	10 PCS	39	45	450 PCS	1,755
3"x12" BULLNOSE	NOMINAL	8	15	15 PCS	14.55	168	2,520 PCS	2,444.4

^{*} WEIGHT PER PALLET DOES NOT INCLUDE PALLET WEIGHT ITSELF. ALL OTHER SIZES WILL BE PACKAGED AS ORDERED.

PLEASE CONTACT MILESTONE CUSTOMER SERVICE AT 1-877-356-7461 FOR PACKAGING INFORMATION.

MINIMUM GROUT SIZE RECOMMENDED = 5 MM (OR APPROX. 3/16") IF STAGGERED TILE PLACEMENT. WE RECOMMEND USING A 30% OFFSET. IF SPECIFIED BRICK PATTERN WITH 1/2 PATTERN MANDATORY, A BIGGER GROUT IS RECOMMENDED TO HIDE IMPERFECTIONS OF INSTALLATION (MINIMUM 1/4").

CERTIFICATIONS & ACCREDITATIONS

GREENWORKS









MEMBERSHIPS





CERTIFICATION





USAGE & FEATURES























PROGRESS THAT TOUCHES AND INVESTS IN THE **ENTIRE SOCIETY**

As a active member of the U.S Green Building Council, Milestone spreads awareness to the entire American communities and encourages towards the use of building solutions inspired by environmentally friendly practices. Using Milestone products for project implementation, will positively contribute in obtaining scores and points required for earning the LEED certification (Leadership in Energy and Environmental Design).

A COMMITMENT TO THE DEVELOPMENT OF PRODUCTS FOR A CONSCIOUS BUILDING TRADE

Milestone offers products containing recycled material. The adoption of eco-compatible production systems is merit of Italian designs produced in the U.S.

TECHNICAL DEVELOPMENT THAT CONSIDERS THE NATURAL ENVIRONMENT

Milestone commits to the eco-compatible project and translates the same into an avant-guard production process, minimizing the negative impact on the environment.

WHY PORCELAIN?

There are many reasons to choose impervious porcelain tile over other floor coverings. It offers the largest array of design options and holds its value the longest. In a comparison between the many different flooring options, porcelain tile offers one of the most durable and least expensive options over the lifespan of the building.

Benefits of Porcelain Tile

- Impervious to water
- Easy to maintain
- Variety of design options
- Environmentally friendly
- Resistant to germs and bacteria
- Fade resistant
- Fire resistant
- Durable best long-term value vs. other floor coverings

SUGGESTED INSTALLATIONS

CLEANING & MAINTENANCE

Routine care instructions:

- 1. Wash with water to remove superficial dirt.
- 2. Application of Fila Cleaner® Fila (commercial product) diluted to an average of 1:200 to the surface.
- 3. Let the solution sit 5-7 minutes.
- 4. Remove the cleaner with a vigorous mechanical cleaning action using common hand cleaning equipment, or a suitable floor-cleaning appliance.
- 5. Dry the floor completely.

Note: For desired results, it is particularly important to combine the effect of the detergent with a vigorous mechanical cleaning action.

The products mentioned in these instructions do not officiate any official agreements with any floor cleaning product producers.



